


# JammeR Loops Trigger Module

Setting up Maschine Jam for owners of MaschineR Jam

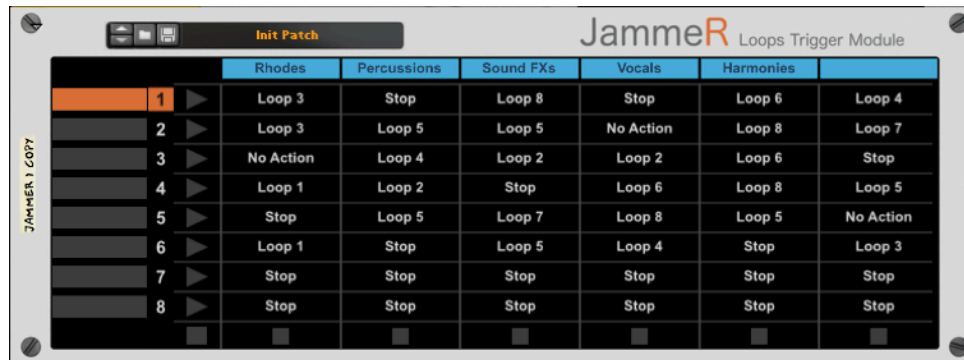

## Step 1: installing the Remote Files

Once you have obtained the Remote Files from [www.retouchcontrol.com/jammer-remote](http://www.retouchcontrol.com/jammer-remote), unzip the folder on your computer, navigate to the "Remote Files" folder and double click on the installer script for your OS.

On OSX, the location where the files are installed depends on your Reason version. For those who have upgraded from an older version (Reason 11 or older), the files are installed in the "Application Support/Propellerhead Software/Remote" folder inside the Library directory (case1). Otherwise the files are installed inside the Reason application bundle (case2). In this last case, the installer script will prompt for your password in order to install the files. In both cases, a Terminal window will open once the process is completed.

On Windows, you will see the Console flash quickly and then closing.

You should make sure that the files have been installed correctly by going to the proper directories on your HD. There should be folders named "JammeR" at these two locations:

**OSX:**

case1: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Codecs/Lua Codecs

case2: Macintosh HD/Applications/Reason #/Resources/Remote/DefaultCodecs/Lua Codecs

**Windows:** C:/ProgramData/Propellerhead Software/Remote/Codecs/Lua Codecs

and

**OSX:**

case1: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Maps

case2: Macintosh HD/Applications/Reason #/Resources/Remote/DefaultMaps

**Windows:** C:/ProgramData/Propellerhead Software/Remote/Maps

Please note, on Windows the directory "ProgramData" is hidden by default. You need to enable "Show hidden files". See how to do it here: <https://support.microsoft.com/en-us/help/14201/windows-show-hidden-files>

At this point, you should restart Reason.

If for some reason the files were not properly copied over by the installer script, you can copy and paste those files manually. This is what you do:

- 1) Go to the download, open Remote Files, then "Lua Codecs", copy the entire "JammeR" folder and paste at this location

**OSX:**

case1: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Codecs/Lua Codecs

case2: Macintosh HD/Applications/Reason #/Resources/Remote/DefaultCodecs/Lua Codecs

**Windows:** C:/ProgramData/Propellerhead Software/Remote/Codecs/Lua Codecs

- 2) Then go back to the download, open Remote Files, then "Maps", copy the entire "JammeR" folder and paste at this location

**OSX:**

case1: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Maps

case2: Macintosh HD/Applications/Reason #/Resources/Remote/DefaultMaps

**Windows:** C:/ProgramData/Propellerhead Software/Remote/Maps

- 3) Restart Reason

**IMPORTANT -> Please make sure to update the MaschineR map files as well. You can download the latest from your account at [www.retouchcontrol.com/login](http://www.retouchcontrol.com/login)**

## Step 2: create a control surface in Reason

With your MIDI device connected to the computer, launch Reason and launch the MaschineR Jam application. Then:

- 1) go to “Preferences” and open the “Control Surfaces” pane
- 2) click on “Add”
- 3) from the “Manufacturer” pull down menu, select “RetouchControl”
- 4) from the “Model” pull down menu, choose “NIJam\_JammeR”
- 5) for the “In Port” and “Out Port” choose the following midi ports:

| Application  | In Port               | Out Port            |
|--------------|-----------------------|---------------------|
| MaschineRJam | “from MaschineRJam 2” | “to MaschineRJam 2” |

Please note, these additional ports are automatically created on Mac. However, on Windows you’ll have to add them in LoopMIDI, which is the virtual MIDI driver you should already be using with MaschineR Jam.

## Step 3: enable the control surface in the MaschineR Jam application

This last step is necessary in order to enable the new control surface you just created in the PusheR application.

- 1) go to the PusheR or PusheR2 application. If you are on Mac, click on the application icon and then select "Show Package Contents".
- 2) once you are in the application folder, navigate to the "support" folder and look for a file named "Settings.json"
- 3) open the "Settings.json" file in a text editor and change the last line as shown below
- 4) save the file, but make sure to keep the "json" extension or the application won't be able to open it!
- 5) relaunch the PusheR application

```
{  
  "MaschineIN" : "Maschine Jam - 1 Output",  
  "MaschineOUT" : "Maschine Jam - 1 Input",  
  "ReasonIN" : "from MaschineRJam 1",  
  "ReasonOUT" : "to MaschineRJam 1",  
  "RE_Enabled" : 1,  
  "RE_Port1" : "from MaschineRJam 2",  
  "RE_Port2" : "to MaschineRJam 2"  
}
```

That's it! You are now ready to control JammeR from your Maschine Jam!

## Control Map

