
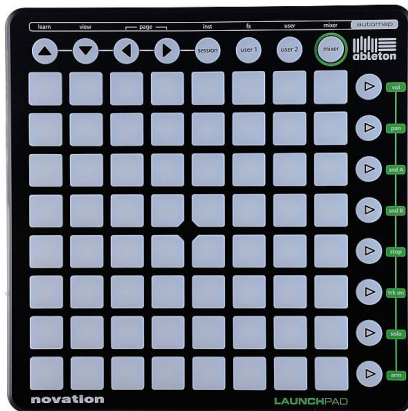


Grid64g Gate Sequencer

Setting up the Novation Launchpad

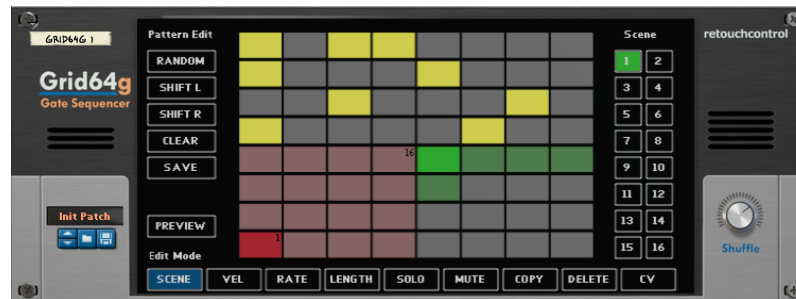

Step 1: installing the Remote Files

Once you have obtained the Remote Files from www.retouchcontrol.com/grid64g, unzip the folder on your computer, navigate to the "Remote Files" folder and double click on the installer script for your OS. On OSX, you will see the terminal window open when the process is completed. On Windows, you will see the console flash quickly and then closing.

You should make sure that the files have been installed correctly by going to the proper directories on your HD. There should be folders named "Grid64g" at these two locations:

OSX: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Codecs/Lua Codecs

Windows: C:/ProgramData/Propellerhead Software/Remote/Codecs/Lua Codecs

and

OSX: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Maps

Windows: C:/ProgramData/Propellerhead Software/Remote/Maps

Please note, on Windows the directory "ProgramData" is hidden by default. You need to enable "Show hidden files". See how to do it here: <https://support.microsoft.com/en-us/help/14201/windows-show-hidden-files>

At this point, you should restart Reason.

If for some reason the files were not properly copied over by the installer script, you can copy and paste those files manually. This is what you do:

- 1) Go to the download, open Remote Files, then "Lua Codecs", copy the entire "Grid64g RE" folder and paste at this location

OSX: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Codecs/Lua Codecs

Windows: C:/ProgramData/Propellerhead Software/Remote/Codecs/Lua Codecs

- 2) Then go back to the download, open Remote Files, then "Maps", copy the entire "Grid64g RE" folder and paste at this location

OSX: Macintosh HD/Library/Application Support/Propellerhead Software/Remote/Maps

Windows: C:/ProgramData/Propellerhead Software/Remote/Maps

- 3) Restart Reason

Step 2: create a control surface in Reason

With your MIDI device connected to the computer, launch Reason. Then:

- 1) go to “Preferences” and open the “Control Surfaces” pane
- 2) click on “Add”
- 3) from the “Manufacturer” pull down menu, select “RetouchControl”
- 4) from the “Model” pull down menu, choose your Launchpad version. Owners of the “Launchpad Mini” should choose the “LP_MK1_Grid64g” model
- 5) for the “In Port” and “Out Port” choose the midi ports of your device (for some Launchpad Mk1 owners, they are both named “Lauchpad”)

That’s it. Your device is set up to control the Grid64g. Next create a Grid64g device in the rack, make sure it has track focus in the sequencer and you should be able to control it from your device. The next section shows how the controls are mapped to the device itself.

Control Maps

